



LED Downlight

DL 367 Series

This is a super slim downlight with high lumen efficiency. The concave design in front and reflector+lens optic combination reduced the height of the lamp and made it anti-glare, which offers a comfortable visual experience.

Besides, it's not only a recessed downlight, but also can-do surface mounted with extra accessory for 4/6/8 inches, CCT adjustable, sensor available, one lamp with multiple function use.

Lifetime 50 000h (L90B50)

5 years warranty

Technical Data Sheet

Code	DL367-4-xxW	DL367-5-xxW	DL367-6-xxW	DL367-8-xxW
Watt (W)	9W-12W	11W-16W	12W-24W	12W-24W
Luminous Flux (lm) +/- 5%	1300lm- 1750lm	1600lm- 2200lm	1780lm- 3200lm	1850lm- 3450lm
Dimension (mm)	Ø145*55	Ø170*58	Ø190*61	Ø228*61
Cutout (mm)	120-130	140-150	160-170	200-210
N.W. (Kg)	0.32	0.39	0.44	0.59

"xx" represents rated power

Rated Input Voltage AC220-240V

Light Source LED 2835

CCT: 3000K / 4000K / 5000K / 5700K

CRI >80

Beam Angle 60°

Working temperature: -20°C - + 40°C

Electrical Class II

Power factor 0.9

IP40 / IP54 / IK02

Product Finishing White / other colors on request

Material of housing Aluminum diecast


Material of optics PC+ALU

Energy class D

RG1 according to IEC/TR62778

Photobiological safety according to EN62471

Induction Range

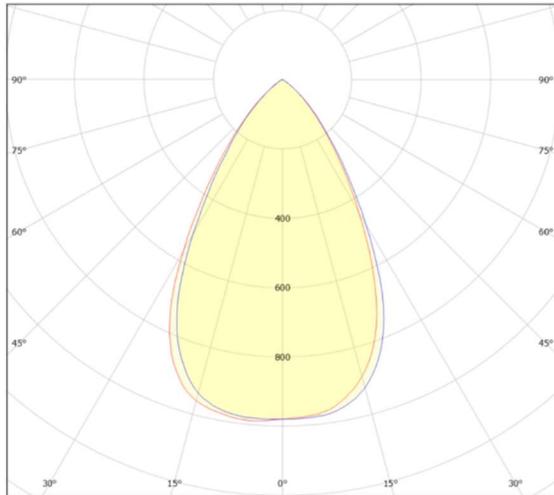

Installation

