



Efficiency. Environment. Profit.



ECO Back-lit Panel Light

ECO Back-lit Panel Light with PC diffuser is the most cost-effective LED solution, offering qualified and reliable lighting in work areas, with an extended life cycle, creating a brighter and healthier office/classroom environment.

Benefits

- Provides comfortable light with excellent uniformity
- IP20
- UGR<22

Features

- High efficiency 140lm/W
- 5 yrs Warranty, lifespan of 50,000 hours (L90B50)
- Energy class D

Application

Can be used in offices/classrooms/hallways etc




Model	PVPL3060-18W	PVPL6060-30W	PVPL6262-30W	PVPL30120-30W
Wattage	18W	30W	30W	30W
Driver Efficiency	86%	88%	88%	88%
Luminous flux	2520lm	4200lm	4200lm	4200lm
Luminaire efficacy	140lm/w	140lm/w	140lm/w	140lm/w
CCT	4000K	4000K	4000K	4000K
Ra	Ra>80	Ra>80	Ra>80	Ra>80
Beam angle	120°	120°	120°	120°
Dimension	295*595mm	595*595mm	620*620 mm	295*1195 mm
Working voltage	AC220-240V, 50/60Hz			
PF	0.9			
SDCM	<5			
Flicker Free	Yes			
Diffuser	PC			
Surge	1KV			
Operating temperature	-20~45°C			
Protection Class IEC	Class II			
Protection	IP20			
Standard	CE/ROHS/ENEC			
Lifespan	50 000h@Ta 25°C			
Warranty	5yrs			

Dimension of Panel Light

Model no.	A	B	C	weight
PVPL3060-18W	295	595	32	0.8kg
PVPL6060-30W PVPL6262-30W	595	595	32	1.6kg
PVPL30120-30W	1195	295	32	1.6kg



Accessory - Frame

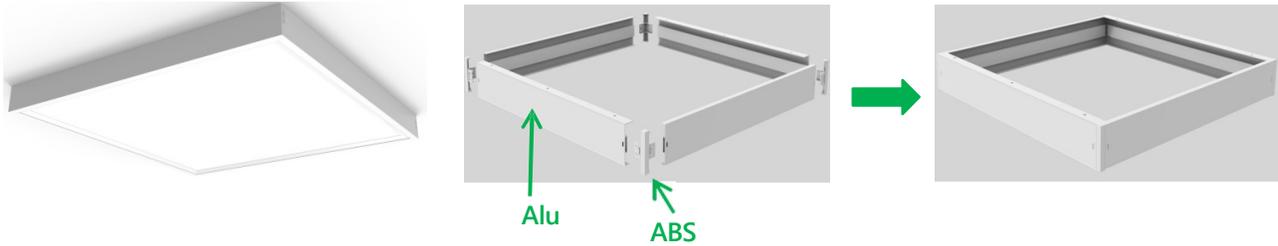

Item	Dimension L*W*H (mm)	Material Composition	Product color	Product weight	Mounting location
Frame 30x60	604*304*75	Aluminum 6063-T5 & ABS (Acrylonitrile Butadiene Styrene)	White	0.64kg	Ceiling
Frame 60x60	604*604*75	Aluminum 6063-T5 & ABS (Acrylonitrile Butadiene Styrene)	White	0.85kg	Ceiling
Frame 30x120	1204*304*75	Aluminum 6063-T5 & ABS (Acrylonitrile Butadiene Styrene)	White	1.06kg	Ceiling

Dimension of Frame

