


T8 LED Tube



Features

- Half PC with half Alu
- Built-in driver
- Rotatable and lockable end cap
- High lumen efficiency 160 lm/W
- Flicker free
- Energy class D
- 5 years warranty
- Operating temperature -20°C to +45°C
- RG0 according to IEC TR 62778
- Photobiological safety according to EN 62471

Structure & Material

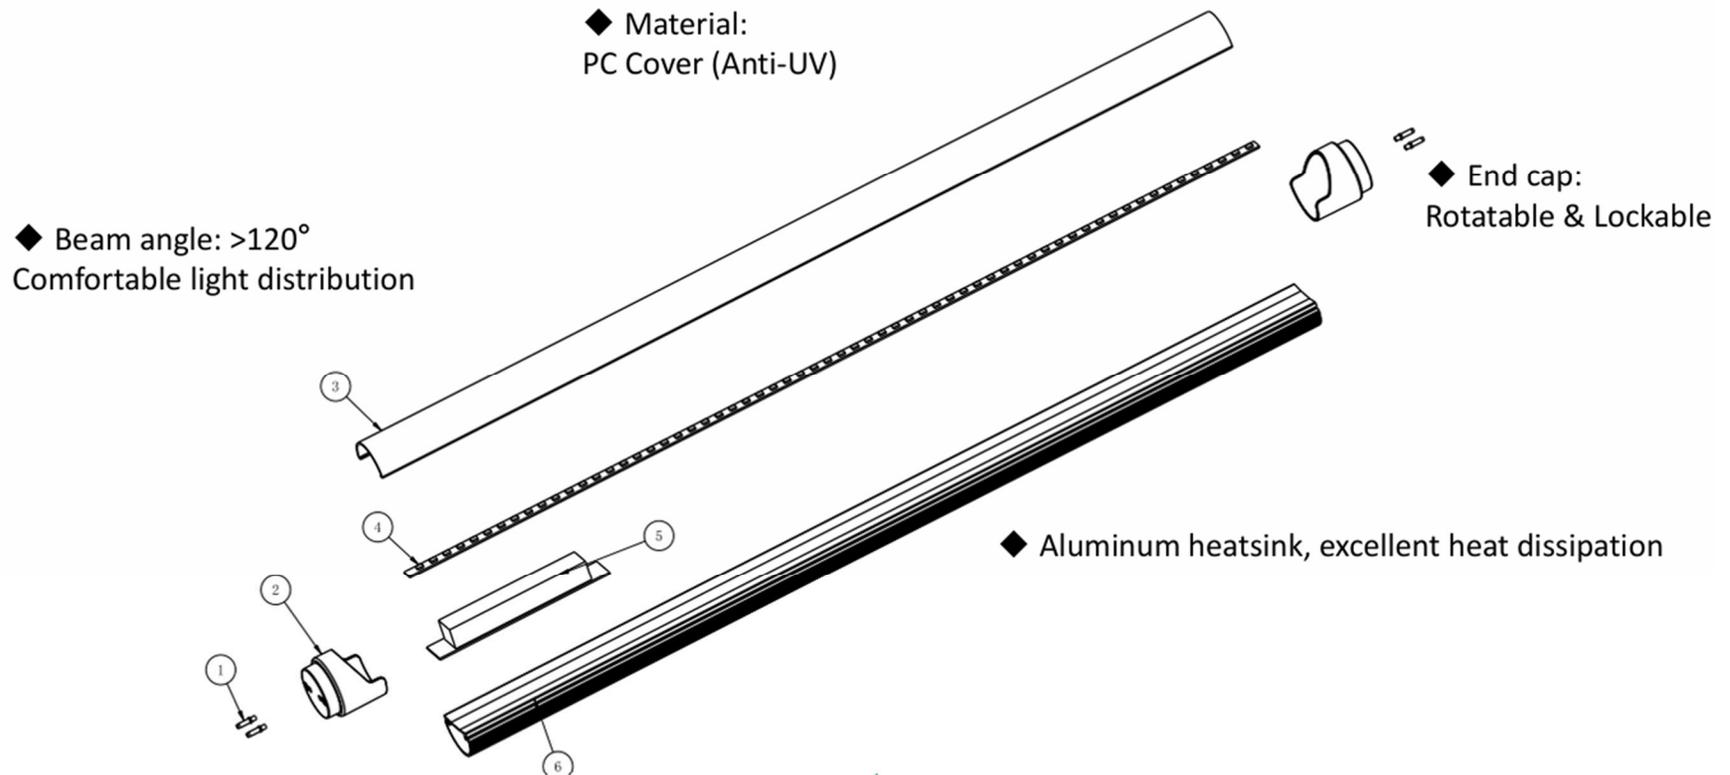

Specifications



Efficiency. Environment. Profit.

| Model No.* | PV-2FT-xxW | PV-4FT-xxW | PV-5FT-xxW |
|---------------------|-------------|-------------|-------------|
| Length (mm) | 600 | 1200 | 1500 |
| Power range | 7W - 13W | 9W - 22W | 13W - 24W |
| Luminous Efficiency | 160 lm/W | 160 lm/W | 160 lm/W |
| Lumen Flux (+/-5%) | 1120-2080lm | 1440-3520lm | 2080-3840lm |
| net weight (KG) | 0.15 | 0.3 | 0.35 |

*xx" represents rated power

- Input Voltage AC220-240V
- Frequency 50/60Hz
- Electrical protection class I or II
- Power factor 0.9
- Socket G13
- LED 2835
- CCT: 3000K / 4000K
- CRI >80
- Beam angle 120°
- IP20 / IP40 available on request
- Lifespan 50 000hrs (L90B50)

Installation



WARNING

SWITCH OFF POWER BEFORE STARTING REPLACEMENT

NEVER DISASSEMBLE THE PRODUCT

ANY CONSTRUCTIVE CHANGE OF THE LUMINAIRE IN CASE OF APPLYING RETROFIT LED LAMPS SHALL NOT BE PERMITTED