


Ultra Back-lit Panel Light

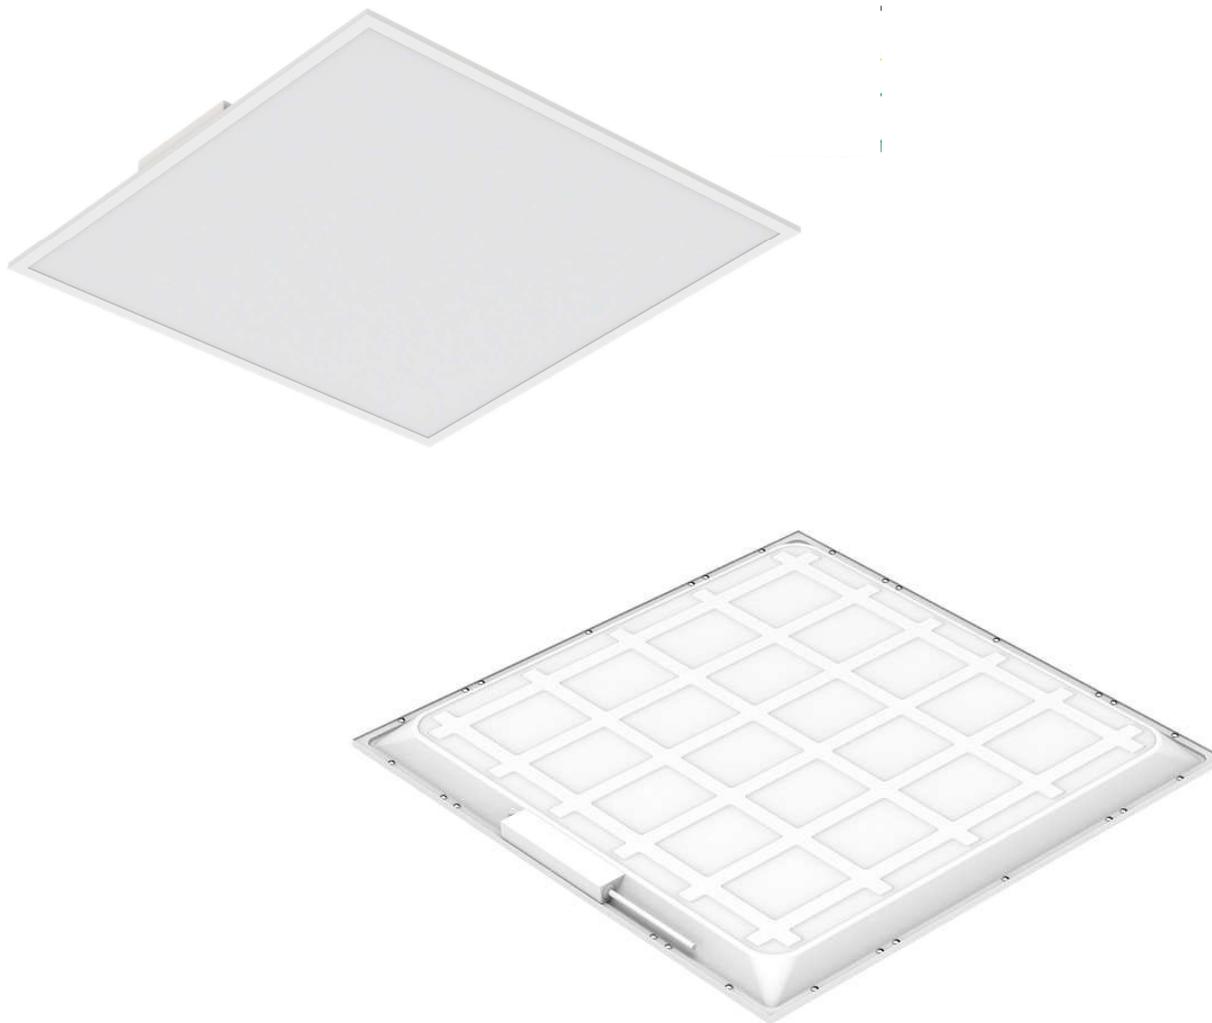

Features

- Alu frame, PC diffuser
- High lumen efficiency 173 lm/W
- Operating temperature -20°C to + 45°C
- Flicker free
- Energy class C
- 5 years warranty
- Lifespan 50 000hrs (L90B50)
- RG0 according to IEC TR 62778
- Photobiological safety according to EN 62471


Specifications




Model No.	PVPL6060-22W	PVPL30120-22W
size (mm)	595x595	295x1195
Luminous Efficiency	173 lm/W	173 lm/W
Lumen Flux (+/-5%)	3806lm	3806lm
net weight (KG)	1.6	1.6

- Input Voltage AC220-240V
- Frequency 50/60Hz
- Electrical protection class II
- Power factor 0.9
- CCT: 4000K
- CRI >83
- Beam angle 120°

Panel Crosscut

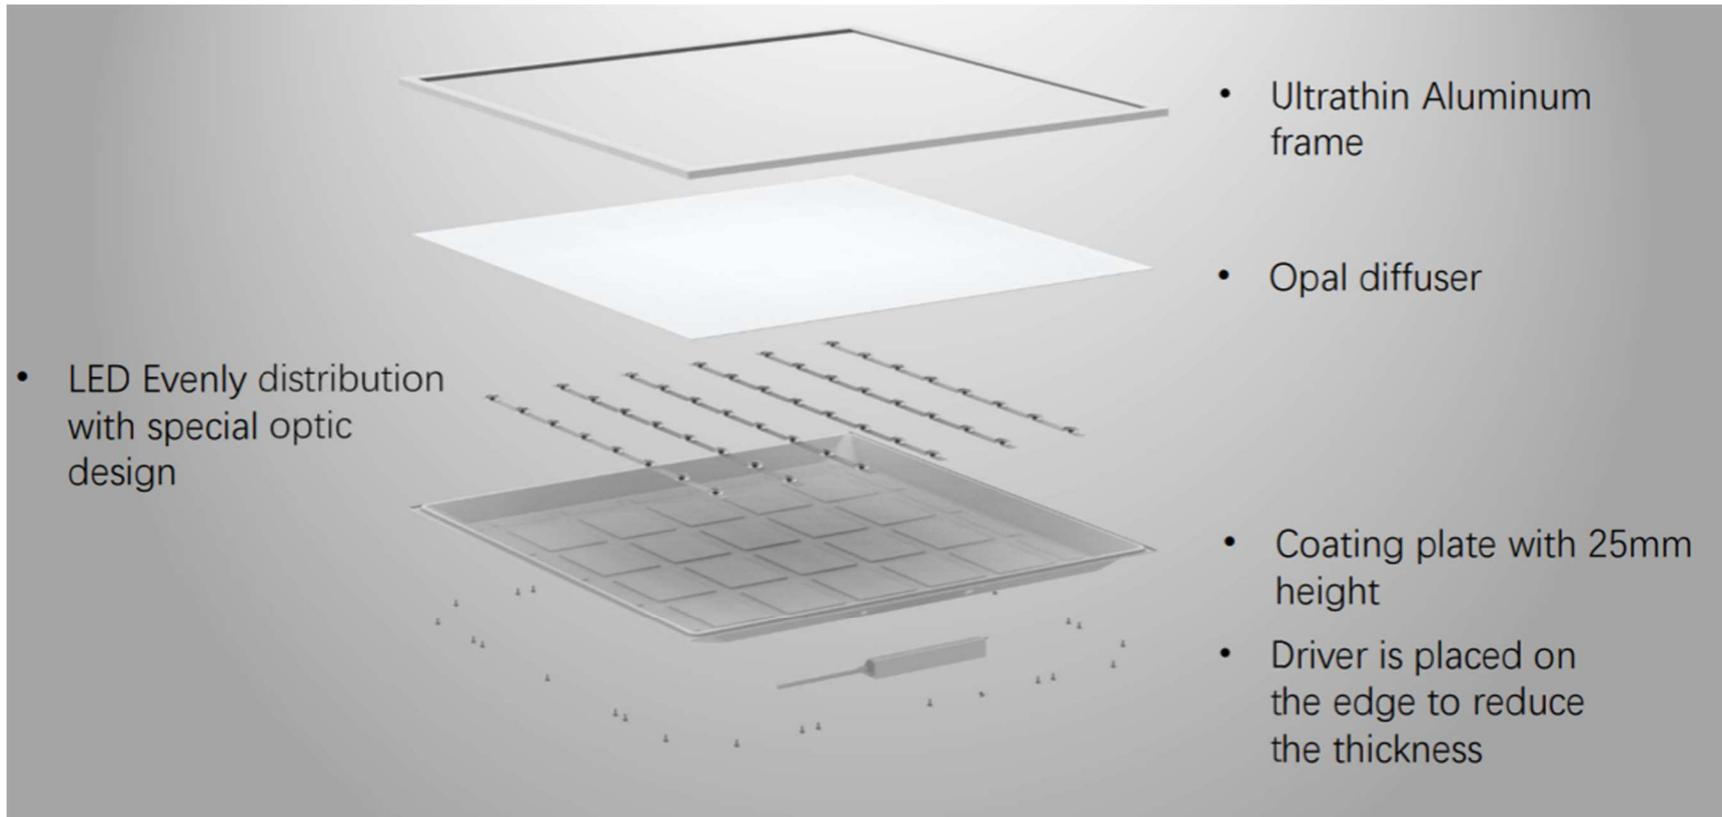

Dimensions (mm)

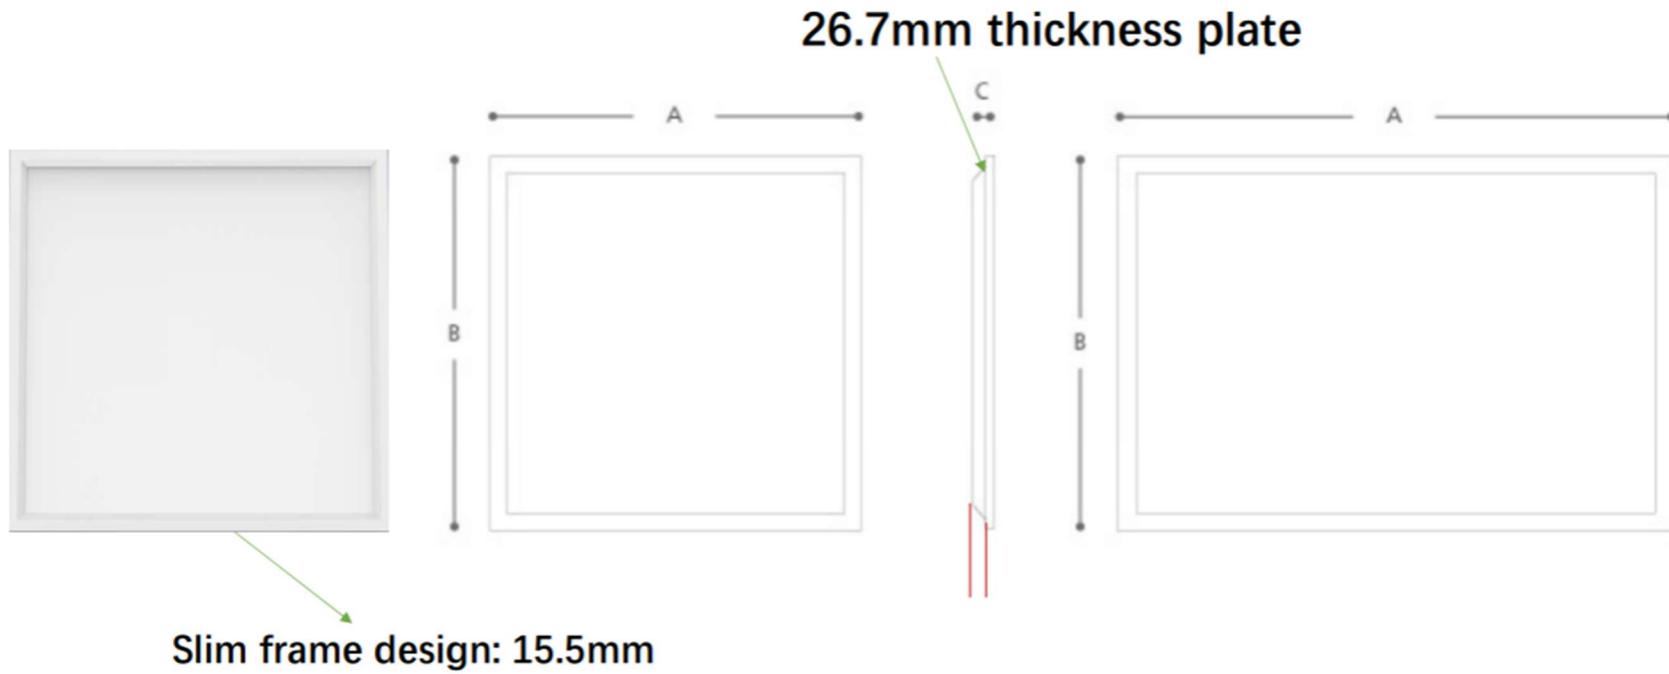

A 595mm / 1195mm
B 595mm / 295mm
C 26.7mm